

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

	REVISIONS									
RE\	ECR	DESCRIPTION	DATE	INITIAL	APPROVED					
1	15.0206	ADDED .76 X 45° CHAMFER, ADDED NOTE 2, CH'D PIN DIAMETER WAS 2X Ø2.667 IS Ø2.7432.	11/20/2015	RJC	JAG					



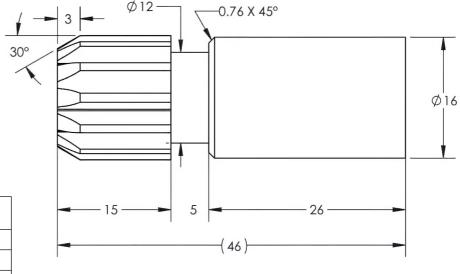

EXTERNAL SPLINE DATA INVOLUTE PROFILE SIDE FIT FILLET ROOT

Pressure angle	30°
MODULE	1.27
NUMBER OF TEETH	12
PITCH DIAMETER	15.240
BASE DIAMETER	13.19823
CIRCULAR SPACE THICKNESS (EFFECTIVE)	/
CIRCULAR SPACE THICKNESS (ACTUAL)	1.880/1.900
PINS DIAMETER	2.7432
DIMENSION BETWEEN PINS	19.634/19.594
MAJOR DIAMETER	16.500/16.400
MINOR DIAMETER	12.590/12.460
MAX T.I.F. DIAMETER	13.868
MAX CUMULATIVE PITCH ERROR BETWEEN TWO TEETH	.036
MAX PROFILE ERROR (TOTAL)	.008/013
MAX PARALLEL (SM ERROR TOTAL)	.008
mating spline	4G6320A11131

SCALE

- NOTE:

 1. THIS DRAWING IS USED FOR TOOTH PROFILE ONLY.

 2. ALL DIMENSIONS IN MILLIMETERS UNLESS SPECIFIED.

	DART							
	SPLINED REACTION							
	DWG NO. RBW6305G31351-3G							
	MAT'L 1018/1020		DRAWN BY: CLOUGH					
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		APPROVED	I Gilber	ť			
	.XXX ± .005 FRAC	TIONS ± 1/8	HEAT TREAT	, ,				
	.XX ± .01 ANGLES ±.5°		FINISH CAD PLATE YELLOW					
	BREAK ALL SHARP EDGES .015 x 45° OR .015R DIMENSIONAL LIMITS APPLY AFTER PLATTING		SPEC QQ-P-416, TYPE II, CLASS II					
PG.			USED ON MODEL					
			AW139					
	CCALE	DATE						

DATE 11/17/2014

SHEET 1 OF 1

ASSY QTY UNIT B/O Part # Description Material B/O INFORMATION OR SPECIFICATIONS 1 EXTERNAL SPLINE 1018/1020